

AZ984

20 AMP 280-ISO AUTOMOTIVE RELAY

FEATURES

- Up to 20 Amp switching in a compact size
- SPST (1 Form A), SPDT (1 Form C)
- Vibration and shock resistant
- Designed for high in-rush applications (120 A)
- Coil suppression available
- ISO/TS 16949, ISO9001, ISO14000
- Tested in accordance with SAE J2544



CONTACTS

Arrangement	SPST (1 Form A) SPDT (1 Form C)
Ratings	Resistive load: Max. switched power: 270 W Max. switched current: 20 A Max. switched voltage: 40 VDC* Rated load: 20 A at 13.5 VDC (1 Form A) * If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.
Material	Silver tin oxide
Resistance	< 50 milliohms initially (6 V, 1 A voltage drop method)

COIL

Power At Pickup Voltage (typical)	476 mW
Max. Continuous Dissipation	3.8 W at 20°C (68°F) ambient
Temperature Rise	60°C (108°F) at nominal coil voltage
Max Temperature	180°C (356°F)

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 1 x 10 ⁶ 1 x 10 ⁵ at 20 A 14 VDC Res.
Operate Time (max.)	4 ms max. at nominal coil voltage
Release Time (max.)	1.5 ms max. at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	500 VAC coil to contact 500 VAC between open contacts
Insulation Resistance	100 megohms min. at 20°C, 500 VDC 50% RH
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating Storage	At nominal coil voltage -40°C (-40°F) to 125°C (257°F) -40°C (-40°F) to 180°C (356°F)
Vibration	0.062" DA at 10-55 Hz
Shock	10 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy
Weight	21 grams



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

8/13/09


AZ984

RELAY ORDERING DATA

STANDARD RELAYS					
COIL SPECIFICATIONS				ORDER NUMBER*	
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Coil Resistance $\pm 10\%$	Form A (SPST)	Form C (SPDT)
12	7.2	20.4	109	AZ984-1A-12D	AZ984-1C-12D
24	14.4	36	360	AZ984-1A-24D	AZ984-1C-24D

*Add suffix "R" for a 680 ohm resistor in parallel with coil.

MECHANICAL DATA

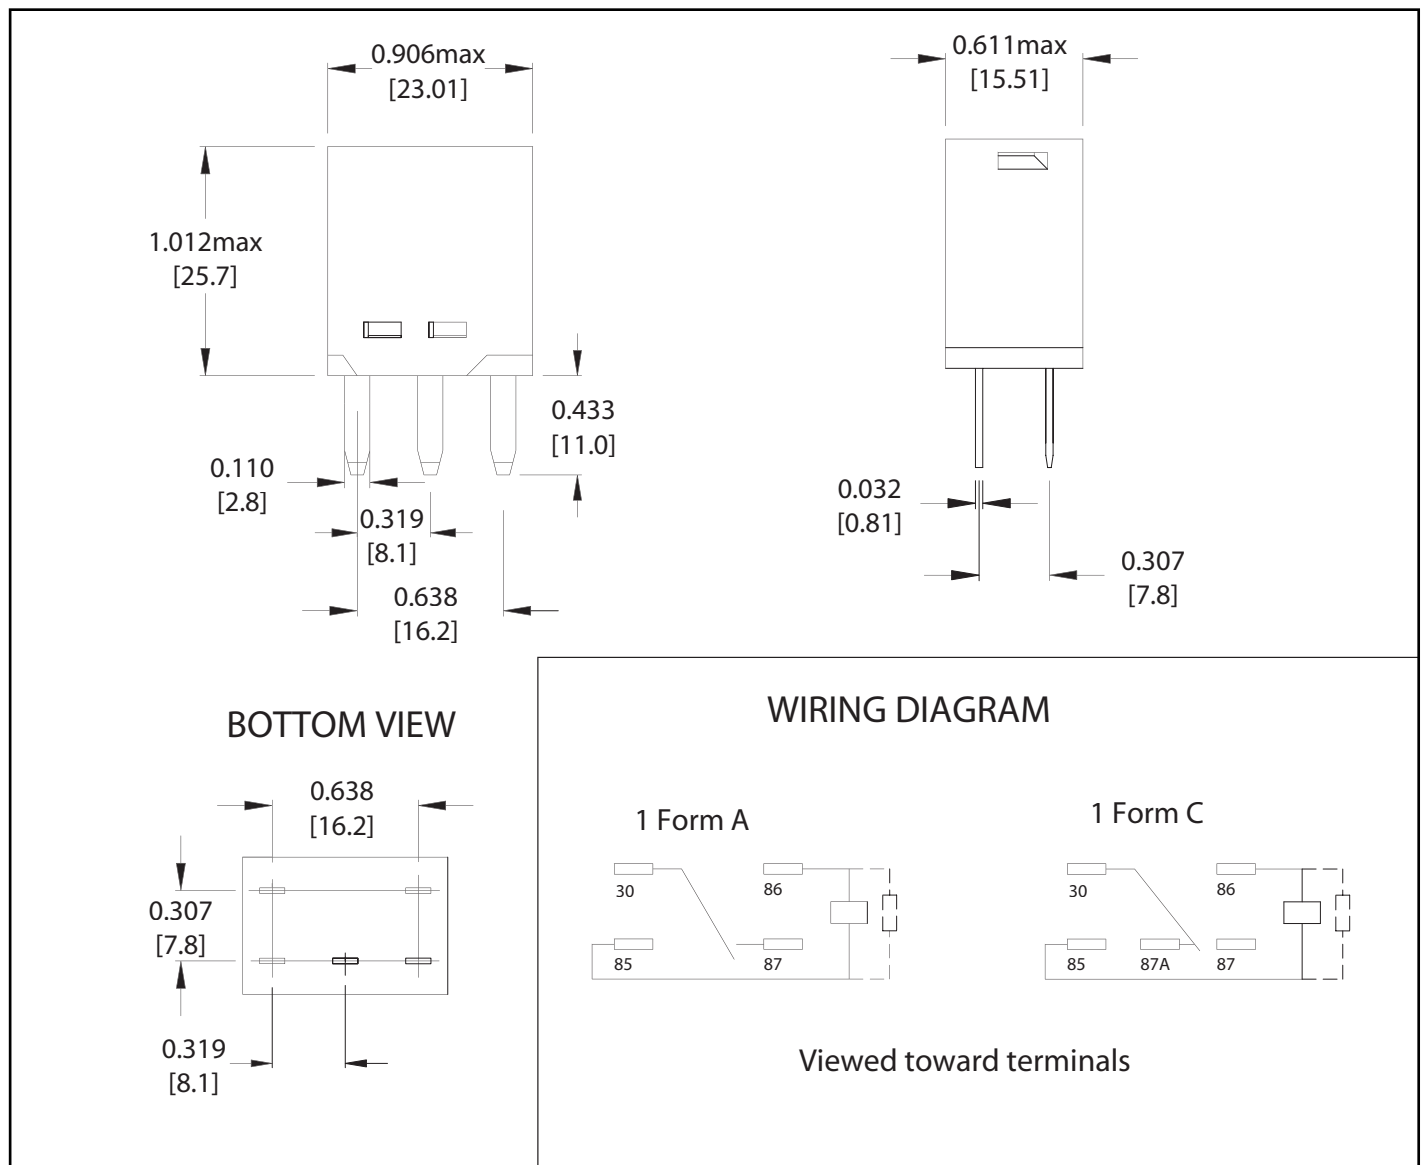

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "



AMERICAN ZETTLER, INC.

www.azettler.com

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

8/13/09